

# Pre Power Amplifier PA-2302



## Functional Description


1. 5 channel MIC inputs; 3 channel AUX inputs; 2 channel EMC inputs; 2 channel LINE outputs.
2. Independent volume control for MIC and AUX, master volume control.
3. Treble and bass tone control.
4. EMC and MIC 1 top priority

## Front Panel



- |                 |   |                                 |
|-----------------|---|---------------------------------|
| 1. Power Switch | 4. Bass Control                           | 7. MIC 5/4/3/2/1 Volume Control |
| 2. Power LED    | 5. Treble Control                         | 8. Mic 1 output port            |
| 3. Volume Maste | 6. Auxiliary Input 3, 2, 1 Volume Control |                                 |

## Rear Panel

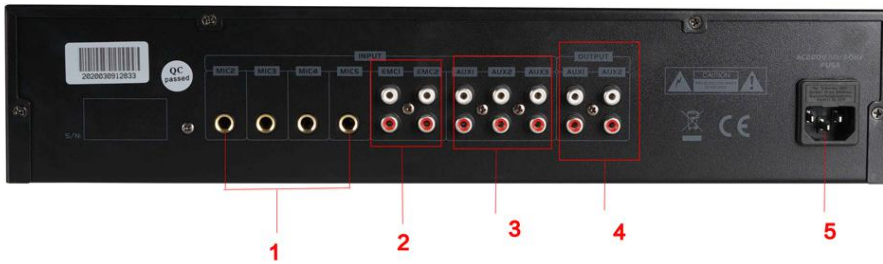

1. MIC 2, 3, 4, 5 Input Ports
2. EMC 1, 2 Input Ports
3. AUX 1, 2, 3 Input Ports
4. Output Ports
5. AC Power Port

## Specifications

Model	PA-2302
Input	Mic 1~5: 600Ω, Unbalanced 18MV, AUX1~3: 10KΩ, 200MV, Unbalanced
Control Channel	600 Ω 1V
Frequency Response	20Hz ~ 20KHz
S/N	Mic input:65dB Aux Input: 85dB
Tone	Bass: ±10dB AT 100Hz Tebele: ±10dB AT 100Hz
Power Consumption	18W
Power Input	AC 220-240v /50-60Hz
Dimensions	485*415*88mm
Weight	6.5KG